



CO: 800.524.8672
TX: 888.546.4641
www.coloradolining.com

GCL - Geosynthetic Clay Liner

GCL's self healing capabilities and high plasticity promote long life and high performance. GCL's are unaffected by the freeze-thaw cycles and can offer better resistance to differential settlement.

Colorado Lining can supply you with material or facilitate a full installation with one of our certified installation crews. We want to work with you to make your job a success.


Product Features:

- Self Healing
- High Plasticity
- Great Secondary Protection
- Easy Installation
- Wetlands Alternative
- 12" Cover Soil
- Not A Good Primary Liner
- Available Products:
 - BENTOMAT ST
 - BENTOMAT CL
 - BENTOMAT DN
 - CLAYMAX 600CL
 - CLAYMAX 200R

Uses & Applications:

- Landfill Liners & Covers
- Secondary Containment
- Underlayment in Poor Subsurface Conditions
- Canals
- Civil Projects

- ***Project Photo: Rooney Road Landfill in Golden, CO***
- ***Landfill Lagoon Liner System***
- ***2,300,000 SF Geo Clay Liner***

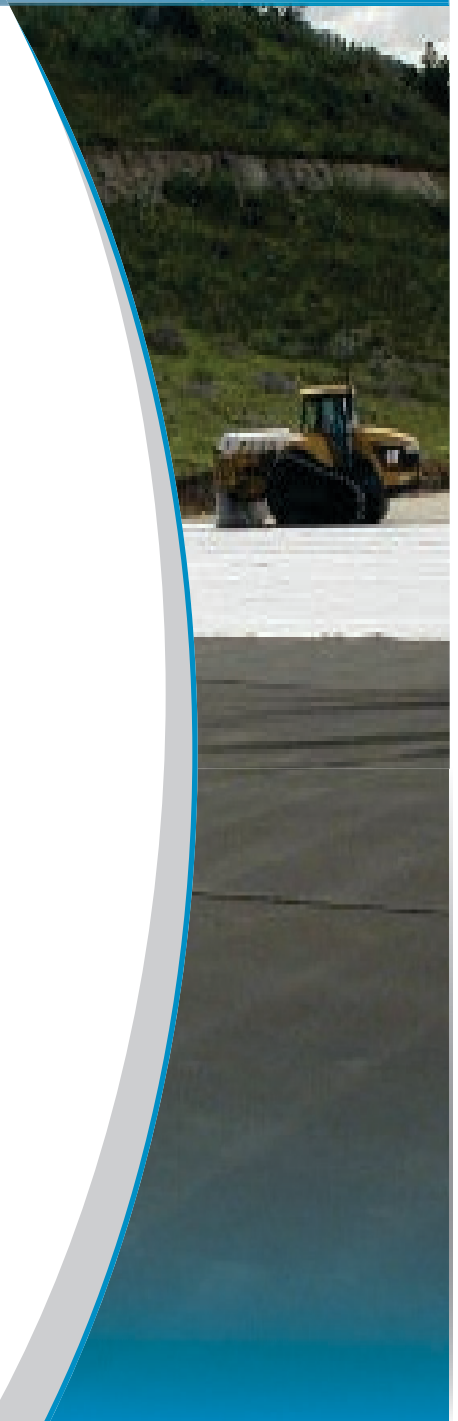



GCL

Product Data Sheet

BENTOMAT DN

MATERIAL PROPERTY	TEST METHOD	TEST FREQUENCY ft ² (m ²)	REQUIRED VALUES
Bentonite Swell Index ¹	ASTM D 5890	1 per 50 tonnes	24 mL/2g min.
Bentonite Fluid Loss ¹	ASTM D 5891	1 per 50 tonnes	18 mL max.
Bentonite Mass/Area ²	ASTM D 5993	40,000 ft ² (4,000 m ²)	0.75 lb/ft ² (3.6 kg/m ²) min
GCL Tensile Strength ³	ASTM D 6768	200,000 ft ² (20,000 m ²)	50 lbs/in (88 N/cm) MARV
GCL Peel Strength ³	ASTM D 6496	40,000 ft ² (4,000 m ²)	3.5 lbs/in (6.1 N/cm) min
GCL Index Flux ⁴	ASTM D 5887	Weekly	1 x 10 ⁻⁸ m ³ /m ² /sec max
GCL Hydraulic Conductivity ⁴	ASTM D 5887	Weekly	5 x 10 ⁻⁹ cm/sec max
GCL Hydrated Internal Shear Strength ⁵	ASTM D 5321 ASTM D 6243	Periodic	500 psf (24 kPa) typ @ 200 psf

BENTOMAT CL

MATERIAL PROPERTY	TEST METHOD	TEST FREQUENCY ft ² (m ²)	REQUIRED VALUES
Bentonite Swell Index ¹	ASTM D 5890	1 per 50 tonnes	24 mL/2g min.
Bentonite Fluid Loss ¹	ASTM D 5891	1 per 50 tonnes	18 mL max.
Bentonite Mass/Area ²	ASTM D 5993	40,000 ft ² (4,000 m ²)	0.75 lb/ft ² (3.6 kg/m ²) min
GCL Tensile Strength ³	ASTM D 6768	200,000 ft ² (20,000 m ²)	45 lbs/in (78 N/cm) MARV
GCL Peel Strength ³	ASTM D 6496	40,000 ft ² (4,000 m ²)	3.5 lbs/in (4.4 N/cm) min
GCL Index Flux ⁴	ASTM D 5887	Periodic	1 x 10 ⁻⁹ m ³ /m ² /sec max
GCL Hydraulic Conductivity ⁴	ASTM D 5887	Periodic	5 x 10 ⁻¹⁰ cm/sec max
GCL Hydrated Internal Shear Strength ⁵	ASTM D 5321 ASTM D 6243	Periodic	500 psf (24 kPa) typical

BENTOMAT ST

MATERIAL PROPERTY	TEST METHOD	TEST FREQUENCY CY ft ² (m ²)	REQUIRED VALUES
Bentonite Swell Index ¹	ASTM D 5890	1 per 50 tonnes	24 ml/2g min.
Bentonite Fluid Loss ¹	ASTM D 5891	1 per 50 tonnes	18 ml max.
Bentonite Mass/Area ²	ASTM D 5993	40,000 ft ² (4,000 m ²)	0.75 lb/ft ² (3.6 kg/m ²) min
GCL Tensile Strength ³	ASTM D 6768	200,000 ft ² (20,000 m ²)	30 lbs/in (53 N/cm) MARV
GCL Peel Strength ³	ASTM D 6496	40,000 ft ² (4,000 m ²)	3.5 lbs/in (6.1 N/cm) min
GCL Index Flux ⁴	ASTM D 5887	Weekly	1 x 10 ⁻⁸ m ³ /m ² /sec max
GCL Hydraulic Conductivity ⁴	ASTM D 5887	Weekly	5 x 10 ⁻⁹ cm/sec max
GCL Hydrated Internal Shear Strength ⁵	ASTM D 5321 ASTM D 6243	Periodic	500 psf (24 kPa) typ @ 200 psf

BENTOMAT[®] 200R

MATERIAL PROPERTY	TEST METHOD	TEST FREQUENCY CY ft ² (m ²)	REQUIRED VALUES
Bentonite Swell Index ¹	ASTM D 5890	1 per 50 tonnes	24 ml/2g min.
Bentonite Fluid Loss ¹	ASTM D 5891	1 per 50 tonnes	18 ml max.
Bentonite Mass/Area ²	ASTM D 5993	40,000 ft ² (4,000 m ²)	0.75 lb/ft ² (3.6 kg/m ²) min
GCL Tensile Strength ³	ASTM D 6768	200,000 ft ² (20,000 m ²)	30 lbs/in (53 N/cm) MARV
GCL Peel Strength ³	ASTM D 6496	40,000 ft ² (4,000 m ²)	1 lbs/in (1.75 N/cm) min
GCL Index Flux ⁴	ASTM D 5887	Weekly	1 x 10 ⁻⁸ m ³ /m ² /sec max
GCL Hydraulic Conductivity ⁴	ASTM D 5887	Weekly	5 x 10 ⁻⁹ cm/sec max
GCL Hydrated Internal Shear Strength ⁵	ASTM D 5321 ASTM D 6243	Periodic	150 psf (7.2 kPa) typ @ 200 psf