



Solvent-Free & Environmentally Safe

Ecodur SPRAY LINER

FEATURES

- Ecodur is NSF 61 certified and VOC/solvent-free
- Easy application that cures/dries quickly, in a variety of temperatures and conditions
- Cost effective and durable
- UV stable with a long service life
- Ecodur is chemical resistant with low permeability and excellent sustainability

Ecodur Spray Liner is a solvent-free spraying system that can be used to apply multiple component 'biosafe' and highly durable protective plastic coatings in the field. This extremely robust and flexible coating is 100% natural, and has a long pedigree of protecting a wide range of containment applications.

APPLICATIONS

- Shotcrete and concrete sealing
- Tanks
- Piping systems and pipelines
- Equipment protection
- Roof repairs


FOR MORE INFO CALL 800.524.8672



WWW.COLORADOLINING.COM

VERSION UPDATE 02.21.17


Product Data

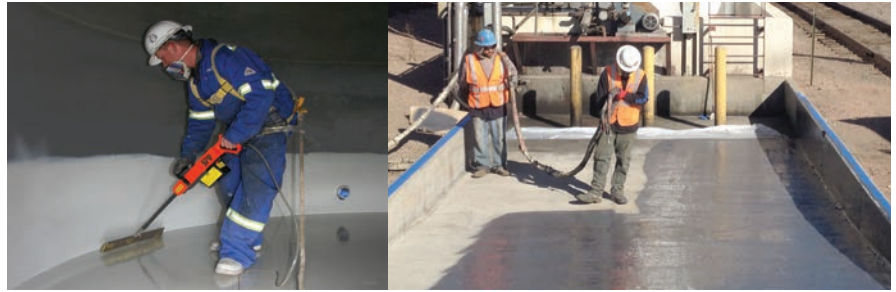

WB Hydroseal



A system in which we create a secondary seal between a substrate and the geomembrane liner system. This seal includes a spray coating that starts on the substrate, continues over the mechanical termination bar and onto the geomembrane liner. By having a continuous coating covering the entire termination area, it provides a secondary watertight seal between the liner and substrate. The coating can also be applied to the surrounding concrete in the area to provide a barrier to make sure water is not lost through old, fractured, decaying or porous concrete. The use of coatings to enhance the characteristics and performance of steel, concrete and geosynthetics is increasing through the civil engineering sector.

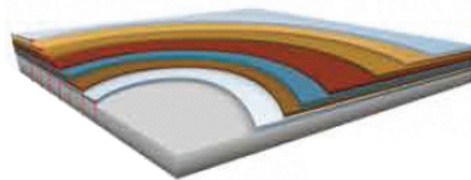

Rapid Return to Service

- Ecodur 201 has cure times between 15 seconds and 2 hours
- Rapid cure makes it possible to apply in cold weather
- Self-leveling product if longer cure time is utilized
- Smooth finish when cured
- Saves money by eliminating lengthy bypass pumping

Single Coat Application

- Cost savings over multi-layer systems
- No possibility of inner-layer delamination
- No inner layer compatibility issues
- Tenacious bond to original substrate

FOR SALES INFORMATION

Corporate Headquarters - Denver: 800.524.8672 / 303.841.2022

Houston Office: 888.546.4641 **California Office:** 303.951.5942

WWW.COLORADOLINING.COM

CLI has over 35 years of experience in the geosynthetics industry, and we offer custom Design-Build solutions that are cost effective and reliable. Our services include Geomembrane and Spray Coating Materials, Custom Fabrication, and Certified Installation.